



HERCULOK™


FLOORS

STURDY FROM THE GROUND UP


BIN DIAMETER	STANDARD	OPTIONAL
15' - 42' Farm Bins	20 gauge	18 gauge
48' Farm Bins	18 gauge	-
54' - 105' Commercial Bins	18 gauge	-

HERCULOK™ FLOORS


Superior's Herculok™ floors are formed without removing steel so they're heavier and stronger than other perforated bin floors. The interlocking floor design features a locking tab when the planks are snapped together, ensuring the floor stays in place. Ribbed flashing provides the strength required for taller eave heights and traction for Superior sweep wheels.

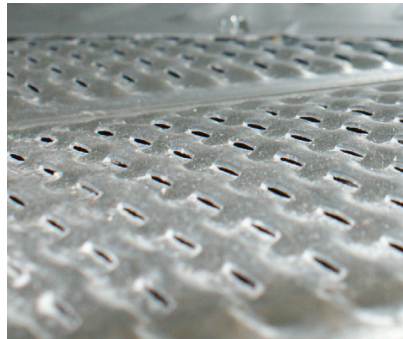

STANDARD 12% OPENING

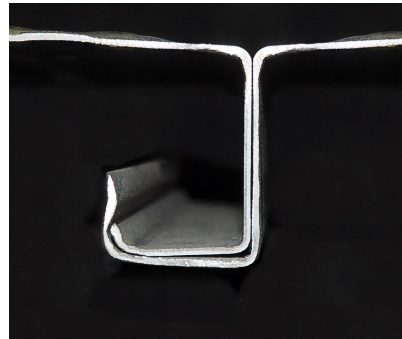

INTERLOCKING DESIGN

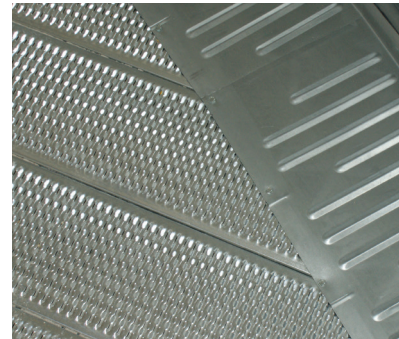

LO- AND HI-BACK FLASHING

Optional Herculok™ Canola floors feature 8 percent openings that keep smaller grains from impeding airflow.

Optional .050-inch and .093-inch perforated floors available.

HERCULOK™ Z-SUPPORT

The Herculok™ Z-support features multiple vertical breaks and interlocking tabs for increased strength and stability. The floor securely locks in place on the vertical breaks to reduce floor failures. Welded supports provide extra strength for larger bin needs.



MULTIPLE VERTICAL BREAKS



INTERLOCKING TAB



WELDED FLOOR SUPPORT

866-822-9145
SUPERIORBINS.COM

